


Electric Heating Element

Model #9506/1

The 9506/1 heating element incorporates an adjustable rheostat control in the power cord. This offers a range of power settings and operator control.

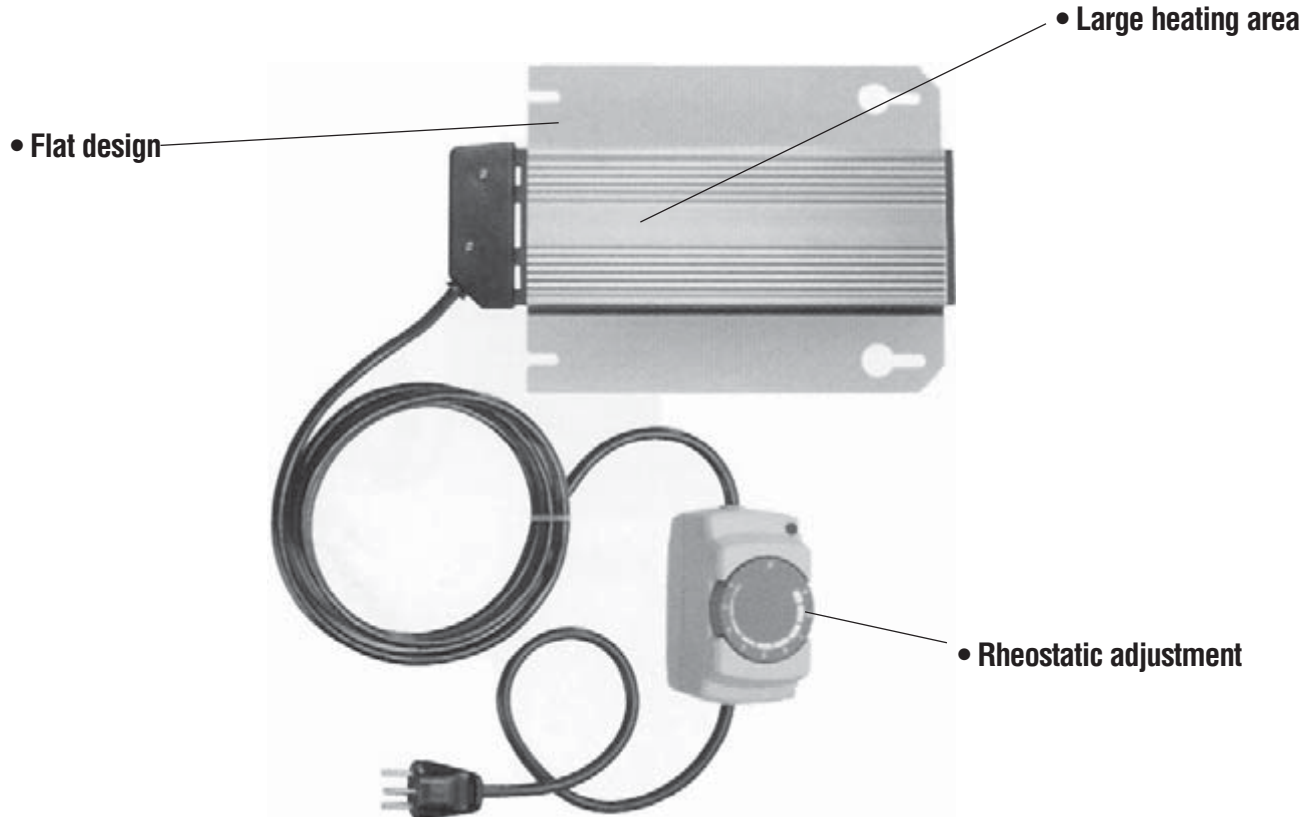

Technical Data

| | | | |
|----------------------|-----------------------------------|-------------------|---------------------------------------|
| Part No. | 9506/1 | Power cord: | PVC cable, 8 ft with grounded plug |
| Operating voltage: | AC 100-120V | Protection class: | I (grounded) |
| Heating power: | 700W | Protection type: | IP 54 (protected against water spray) |
| Operating current: | 5A at 120VAC | Weight: | Approx. 2.2 lbs. |
| Surface temperature: | Approx. 210°C when not mounted | Approvals: | UL, VDE |
| Heating element: | Micanite heating element | Applications: | Chafing dishes |
| Overheat protection: | Adjustable heat control | | |
| Heater body: | Aluminum profile, silver anodized | | |
| Wire compartment: | Plastic UL94V-0 | | |

Accessories & Options

For use with all Spring rectangular full-size chafing dishes

*Note: Specifications are subject to change without notice, please refer to website for the latest specifications.
One-year warranty.*

Spring^{USA}

Electric Heating Element Diagram

Model #9506/1

