



Project _____

Item # _____ Quantity _____



Unlimited Induction Range

Model #	Voltage	Peak Power	Plug Type
SM-300CR	110-120	300 W	NEMA 5-15P

Description:

Spring USA's Unlimited Induction Range is a energy saving, 300-watt, heating unit for product holding (hold only). With the addition of Edge-to-Edge technology, the unit can read multiple pans regardless of where they are placed. An additional receptacle built-in to the unit allows up to 5 units to be daisy chained in a 15-amp circuit. The unit's flanged cooking surface makes for easy drop-in mounting or it can be used on a countertop.

Construction & Performance Features:

- Separate control panel with 44" cable for easy front mounting
- Rugged, 4 mm thick, easy to clean, tempered glass top
- 100% silicone rubber protective top seal
- 7' power cord with standard plug
- Simple, solid state controls
- Power ON/OFF touch pad
- Power ON/Pan-Present indicator lights
- Over/under voltage protection standard
- Four-Position Set-Hold Temperature Control
- Lighted Temperature Indicator
- Receptacle in back of unit
- Edge-to-Edge technology

- Temperature range

Low	Low-Med	Med-High	High
145-155°F	156-165°F	166-175°F	176-185°F
62-68°C	69-73°C	74-79°C	80-85°C

Standard Warranty:

Spring USA Induction Ranges offer a one (1) year exchange warranty, from the date of invoice, against manufacturers defects. See SpringUSA.com for more details.

Agency Listings:

- ETL
- UL STD 197
- NSF/ANSI STD 4



Available Accessories/Alternate

Configurations:

- Induction-ready Pans [Spring USA Catalog]
- AF-350 Under-Counter Air Filter Ranges [See Spec. SIR-7]
- Built-In, High Power Induction Ranges [See Spec. SIR-3]
- Countertop, Portable Induction Ranges [See Spec. SIR-1]
- Countertop (Hold-Only) Induction Hot Plate [spec SIR-2]


Unlimited Induction Range

Electric Requirements:


Model #	Voltage	Phase	Hertz	Watts	Amps	Plug
SM-300CR	110-120	1	60	300	2.5	NEMA 5-15P

Key Dimensions:

SIDE VIEW

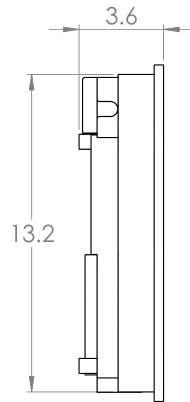

TOP VIEW

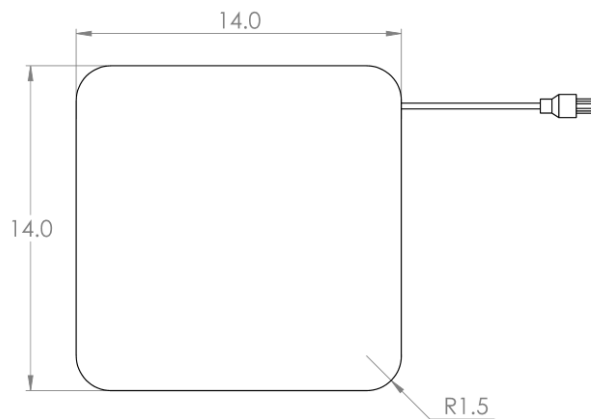


Range cutout: 14.1" L x 14.1" W, R1.6"

Control box cutout: 5.6" L x 1.4" W

Net Weight = 10 lb.

FRONT VIEW

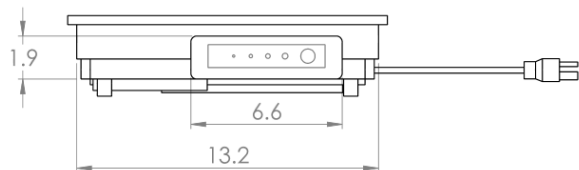

Shipping Dimensions:

Single Unit Shipping Carton			
Length	Width	Height	Weight
17.1"	15.3"	5.7"	12 lb.



Project _____

Item # _____ Quantity _____

Unlimited Induction Range

Notes & Conditions:

1. This induction range must be surface mounted (by others) in a heat resistant countertop (2" thick maximum) or base cabinet with the control module mounted on the front of that enclosure [see cutout dimensions above].
2. For optimum performance, allow 4" clearance from front and sides; 7" below unit for good air circulation. **Cabinet ventilation must be provided.** The inside temperature of the cabinet must not exceed 90°F/32°C.
3. Actual range temperature may vary due to a number of variables, such as ambient temperature in the immediate surrounding area, content and volume of food being heated or cooked, and whether or not you are using a cover on the serving vessel.
4. This induction range requires use of ferrous metal, induction-ready cookware.
5. Spring USA Induction Servers and Induction Warmers/Ranges are designed to work together as a system. Optimal performance is achieved by using Spring USA components in conjunction with each other. As the first to offer such induction systems, Spring USA cannot warranty the performance of facsimile products offered by other companies.