

INDUCTION GRIDDLES

INDUCTION GRIDDLES FOR PROFESSIONALS

High energy efficiency (90%)

- Stainless steel casing
- Counter-top or drop-in
- Precise and hygienic capacitive touch controls
- Superior airflow and cooling fans permit all day use
- 12 temperature settings (122°F - 475°F)
- Fast preheat time: 2 minutes to 400°F
- Easy-to-clean with ice cubes and scraper
- Lower operating temperature due to energy efficiency and heat concentration
- Drain and grease container (Counter-top units only)
- With drain only (drop-in models only)
- Removable grease filter cleans air intake

ORYX

BGIC 3000, 3600

208/240 V



- Counter-top, single zone
- Stainless steel casing with multi-layer grill surface
- Capacitive touch controls with 4 digits display
- 3 preset settings
- Control panel: on/off + (+/-)

KUDU

GLP 6000

208/240 V



- Counter top, two zones
- Stainless steel casing with multi-layer grill surface
- Capacitive touch controls with 4 digits display
- One piece griddle plate with integral back and sides splashes
- Control panel: on/off + (+/-)

GAZELLE


DGIC 3000, 3600

208/240 V




- Drop-in, single zone
- Stainless steel casing with multi-layer grill surface
- Capacitive touch controls with 4 digits display
- 3 preset settings
- Control panel: on/off + (+/-)


Induction Griddles

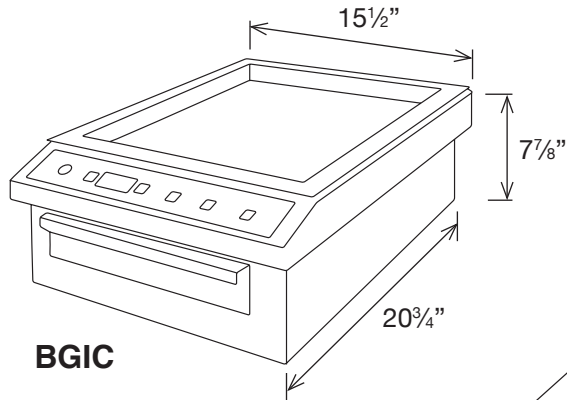

BGIC

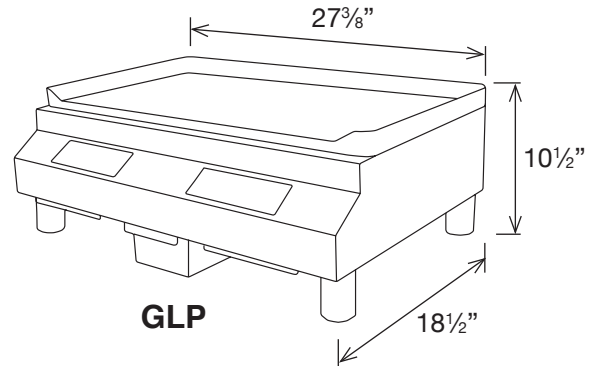

GLP

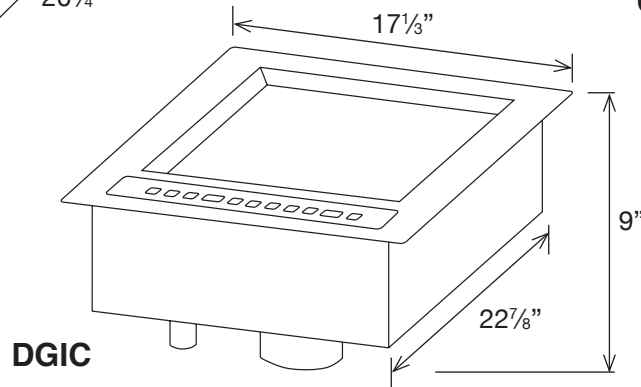

DGIC

SPECIFICATIONS

MODEL	ELECTRICAL	EXTERIOR DIMENSIONS	WORK SURFACE DIMENSIONS	SHIPPING WEIGHT	NEMA PLUG
BGIC 3000	208/240V, 1PH 3.0KW, 12/14 Amps	15½"W x 20¾"D x 7⅞"H	11¾"W x 14¾"D	63 lbs	6 - 20P
BGIC 3600	208/240V, 1PH 3.6KW, 15/17 Amps	15½"W x 20¾"D x 7⅞"H	11¾"W x 14¾"D	63 lbs	L6-30P
DGIC 3000	208/240V, 1PH 3.0KW, 12/14 Amps	17⅓"W x 22⅞"D x 9"H	11¾"W x 14¾"D	63 lbs	6 - 20P
DGIC 3600	208/240V, 1PH 3.6KW, 15/17 Amps	17⅓"W x 22⅞"D x 9"H	11¾"W x 14¾"D	63 lbs	L6 - 30P
GLP 6000	208/240V, 1PH 6.0KW, 25/29 Amps	27⅜"W x 18½"D x 10½"H	25"W x 12½"D	110 lbs	6 - 50P

MODEL	CUT OUT SIZE DROP-IN
DGIC 3000/3600	16¼"W x 21¾"D

*All equipment must be plugged into a dedicated circuit of the proper ratings.

WARRANTY: Limited two-year parts and labor