Project Name: _____ Item #: _____ Quantity: _____

COMMERCIAL OVENS

Equipex Roller Grill Compact Countertop Convection Ovens

MODEL	VOLTAGE	SHELF SIZE	SHELF CAPACITY
FC-33/1 FC-33	120V 208/240V	14.5” x 11.75”	4
FC-34/1 FC-34	120V 208/240V	14.5” x 11.75”	4
FC-280/1 FC-280	120V 208/240V	12.25” x 12”	4
FC-280V/1 FC-280V	120V 208/240V	10” x 12”	5

FC-33
FC-33/1

FC-34
FC-34/1

FC-280
FC-280/1

FC-280V
FC-280V/1

DESCRIPTION

Designed for fast, even cooking performance, these countertop convection ovens deliver consistent baking and roasting results through optimized airflow. Ideal for commercial kitchens requiring efficiency, precision, and a compact footprint.

FEATURES:

- Rear fan and heating element create true convection airflow
- Optimized air circulation for fast, uniform baking results
- Adjustable thermostat up to 450°F with 120-minute timer
- Safety glass door with integrated handle
- Compact, space-saving countertop design
- Optional TURBO QUARTZ infrared overhead heating elements for melting and browning

WARRANTY

One-year limited parts & labor

CERTIFICATIONS

- UL Listed
- UL Safety and Sanitation, NSF 4

c UL us LISTED c UL us NSF 4

APPLICATIONS

Ideal for restaurants, cafés, bakeries, and catering operations. From pastries to entrées, this convection oven delivers fast, even baking while enhancing flavor.

SPECIFICATIONS

MODEL	ELECTRICAL	EXTERIOR DIMENSIONS	INTERIOR DIMENSIONS	PLUG	WEIGHT
FC-33/1 FC-33	120V, 1.7KW, 15 Amps 208/240V, 1PH, 3KW, 13/15 Amps	22”Wx22”Dx14”H	16.4”W×13.8”D×10.4”H	NEMA 5-15 P NEMA 6-15 P	40 lbs
FC-34/1 FC-34	120V, 1.7KW, 15 Amps 208/240V, 1PH, 3KW, 13/15 Amps	22”Wx22”Dx14”H	16.4”W×13.8”D×10.4”H	NEMA 5-15 P NEMA 6-15 P	40 lbs
FC-280/1 FC-280	120V, 1.7KW, 15 Amps 208/240V, 1PH, 2KW, 7/9 Amps	18.5”Wx22”Dx14”H	12.4”W×12.4”D×10.4”H	NEMA 5-15 P NEMA 6-15 P	35 lbs
FC-280V/1 FC-280V	120V, 1.7KW, 15 Amps 208/240V, 1PH, 2KW, 7/9 Amps	14.5”Wx21.13”Dx19.5”H	10.3”W×12.6”D×13”H	NEMA 5-15 P NEMA 6-15 P	35 lbs

FC-33/1, FC-33, FC-34, FC-34/1

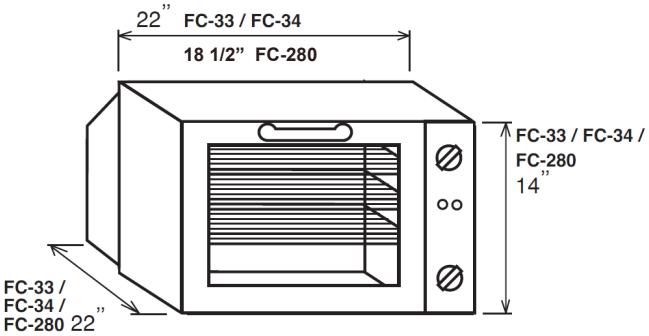

FC-280V, FC-280V/1

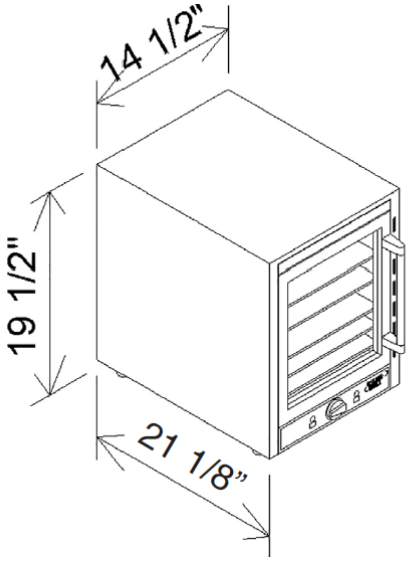

CONSTRUCTION

- Stainless steel interior and exterior construction
- Insulated exterior and door
- Rear-mounted fan and heating element for true convection airflow
- Safety glass door with integrated handle
- 2 Quartz heating elements overhead with convection and broiling capability (on FC-33 model only)

CAPACITY/ CONFIGURATIONS

- FC-33 | FC-33/1: 3 wire racks, 1 drip pan included, 4 optional bake trays, 3 quarter size sheet pans (not included)
- FC-34 | FC-34/1: 3 wire racks, 1 drip pan included, 4 optional bake trays, 3 quarter size sheet pans (not included)
- FC-280/1 | FC-280: 2 wire racks, 1 bake tray included, 4 optional bake trays, 3 quarter size sheet pans (not included)
- FC-280V/1 | FC-280V: 3 slotted shelves, 1 drip pan included, 2 optional slotted shelves, 3 quarter size sheet pans (not included)

SHIPPING DIMENSIONS

MODEL	LENGTH	WIDTH	HEIGHT	SHIP WEIGHT	SHIP TYPE
FC-33/1 FC-33	26”	18”	26”	50 lbs	Parcel
FC-34/1 FC-34	26”	18”	26”	50 lbs	Parcel
FC-280/1 FC-280	26”	18”	26”	45 lbs	Parcel
FC-280V/1 FC-280V	26”	18”	26”	45 lbs	Parcel

NOTES/ CONDITIONS

- Installation Clearance: 2” each side, top and 3” at back
- All equipment must be plugged into a dedicated circuit of the proper ratings